
Grade 8 Clevis Type Self Locking Hook.

- **Model: T-739**



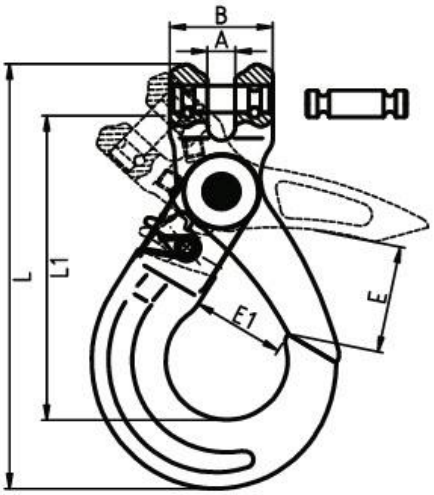

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)	A (mm)	B (mm)	E (mm)	E1 (mm)	L1 (mm)	L (mm)	WLL (t)	Weight (kg)
T-739/6	6	8	32	32	28	99	134	1.12	0.44
T-739/7-8	7/8	9.5	38.5	39	35.8	119.3	161.8	2	0.8
T-739/10	10	12.5	46	48	45	142	195	3.15	1.38
T-739/13	13	15	59	65	52.5	179	249	5.3	2.81
T-739/16	16	18.5	77	65	63.3	224.8	310	8	6
T-739/20	18/20	24	77	85	86	238	335	12.5	7.25
T-739/22	22	25	97.6	80	76	277	392	15	12.8
T-739/26	26	30	118	97.5	96	312	449	21.2	21.8

Specifications are for guidance and may change without notice. Always check suitability before use.