
Grade 8 Swivel Self Locking Hook.

- **Model: T-042**



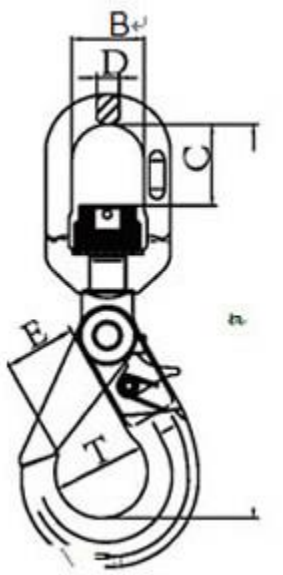

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)	B (mm)	C (mm)	D (mm)	L (mm)	T (mm)	E (mm)	WLL (t)	Weight (kg)
T-042/6	6	32.5	34.8	11.5	163.3	34	27	1.12	0.71
T-042/7-8	7/8	36	40	13	195.2	46	35	2	1.1
T-042/10	10	42	48	15.5	237	56	44	3.15	2
T-042/13	13	50	58	17	282	69	53	5.3	4
T-042/16	16	61	61	21.5	341.5	86	60	8	7.3
T-042/20	20	76	75.5	26.5	399.5	100	87	12.5	11.6
T-042/22	22	97	97	33	461	98	80	15	16

Specifications are for guidance and may change without notice. Always check suitability before use.