
Grade 8 Eye Type Shortening Grab Hook.

- **Model: T-085**



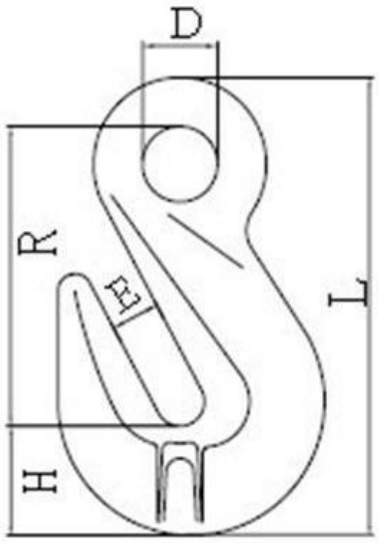

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)	E (mm)	D (mm)	H (mm)	R (mm)	L (mm)	WLL (t)	Weight (kg)
T-085/6	6	8	13.5	17.9	51.4	75.3	1.12	0.14
T-085/7-8	7/8	10.8	18	20	61.5	91.2	2	0.245
T-085/10	10	13	20	29	80	122	3.15	0.65
T-085/13	13	16.5	26	42.8	99.7	158	5.3	1.39
T-085/16	16	20	30.5	47.7	104	169	8	2.2
T-085/20	20	25	37.5	56	140	219	12.5	4.6
T-085/22	22	28	44	68	165	259	15	8.2
T-085/26	26	30	44	77	188.8	298	21.2	9.8
T-085/32	32	38	57	95	228	361	31.5	19.4

Specifications are for guidance and may change without notice. Always check suitability before use.