
Grade 8 Eye Type Foundry Hook.

- **Model: T-116**



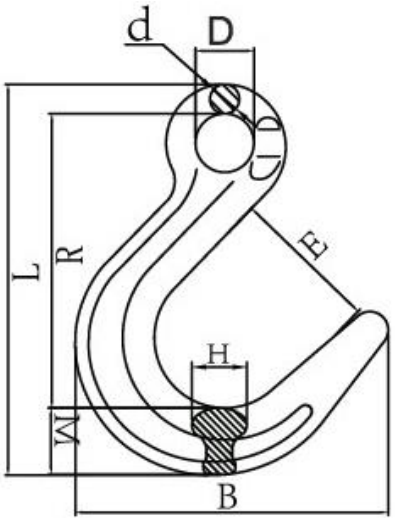

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)	D (mm)	L (mm)	B (mm)	R (mm)	E (mm)	d (mm)	H (mm)	M (mm)	WLL (t)	Weight (kg)
T-116/6	6	20.5	133	100	102.7	49	10	17	19	1.12	0.382
T-116/7-8	7/8	24	158.5	130	120.5	62	12	19	26	2	0.72
T-116/10	10	31.5	199	152.5	153.2	73	15	25	31	3.15	1.25
T-116/13	13	44	241.5	186	184	90	19	33	38.5	5.3	2.32
T-116/16	16	49	279	218	216	105	22	37	42	8	3.45
T-116/20	18/20	60	330	252	247	114	26	46	57	12.5	6.42

Specifications are for guidance and may change without notice. Always check suitability before use.