

Grade 8 Long Shank Swivel Eyebolt with Ring.

- **Model: T-303LS**



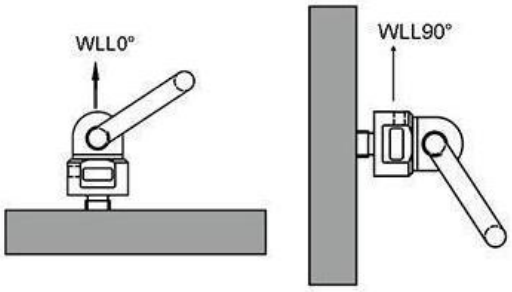

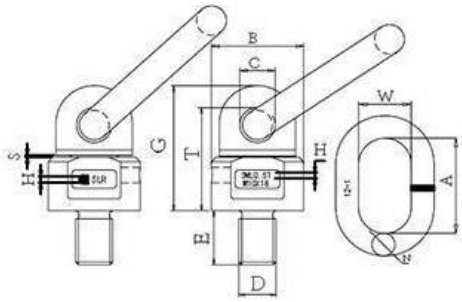

Features:

- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	DxE (mm)	B (mm)	C (mm)	G (mm)	T (mm)	A (mm)	W (mm)	N (mm)	H (mm)	S (mm)	SWL 90° (t)	SWL 0° (t)	Weight (kg)
T-303LS/8	8 x 43	36	16.5	51	41	55	30	14	3	1	0.3	0.6	0.34
T-303LS/10	10 x 90	36	16.5	51	41	55	30	14	3	1	0.5	0.9	0.38
T-303LS/12	12 x 110	36	16.5	51	41	55	30	14	3	1	0.5	1	0.53
T-303LS/16	16 x 120	36	16.5	52	42	55	30	14	3	1	1.12	2	0.60
T-303LS/20	20 x 120	4.95	19	68	56	70	35	16	3.5	1	2	4	1.17
T-303LS/24	24 x 120	57	22	78	65.5	85	40	18	3.5	1.5	3.15	6.3	1.74

Specifications are for guidance and may change without notice. Always check suitability before use.