
Grade 8 Clevis Type Sling Hook & Catch.

- **Model: T-333**



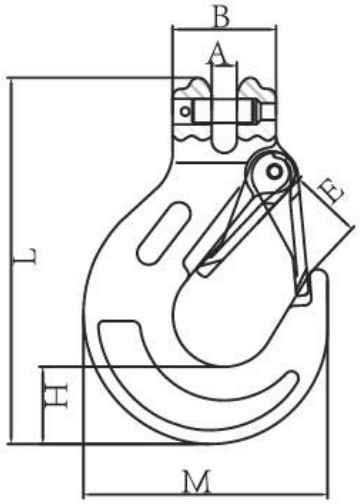

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)	A (mm)	B (mm)	E (mm)	H (mm)	M (mm)	L (mm)	WLL (t)	Weight (kg)
T-333/6	6	7.5	32	19.5	20	68	108	1.12	0.14
T-333/7-8	7/8	9.5	38.5	24	25	85.5	129.5	2	0.245
T-333/10	10	13	48	28	36	106	163.5	3.15	0.65
T-333/13	13	16.5	55	34.5	41.6	130	196	5.3	1.39
T-333/16	16	18.5	65.5	43	46.2	155.5	236	8	2.2
T-333/20	18/20	24	92	51.5	51	180	281	12.5	4.6

Specifications are for guidance and may change without notice. Always check suitability before use.