
Grade 8 Eye Type Sling Hook & Catch.

- **Model: T-334**



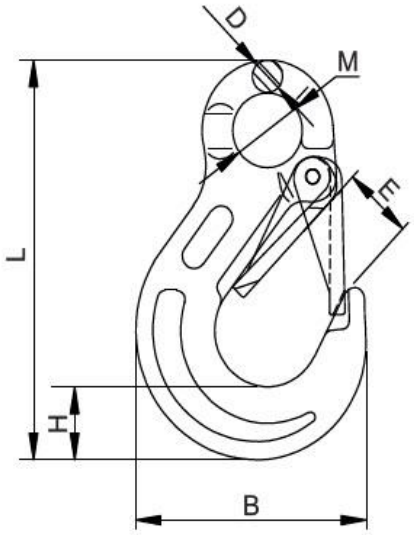

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)	M (mm)	D (mm)	E (mm)	H (mm)	B (mm)	L (mm)	WLL (t)	Weight (kg)
T-334/6	6	20.5	9	18.5	20	68	109	1.12	0.3
T-334/7-8	7/8	25	11	22	27	84	133.5	2	0.48
T-334/10	10	34	14	28	33	102.5	167.5	3.15	1.05
T-334/13	13	42.5	17.5	35	40	128.5	207.5	5.3	1.75
T-334/16	16	52	22	43	48	156.5	253	8	3.2
T-334/20	18/20	62	26	51.5	56	187	300	12.5	5.3

Specifications are for guidance and may change without notice. Always check suitability before use.