
Grade 8 Eye Type Self Locking Hook.

- **Model: T-737**



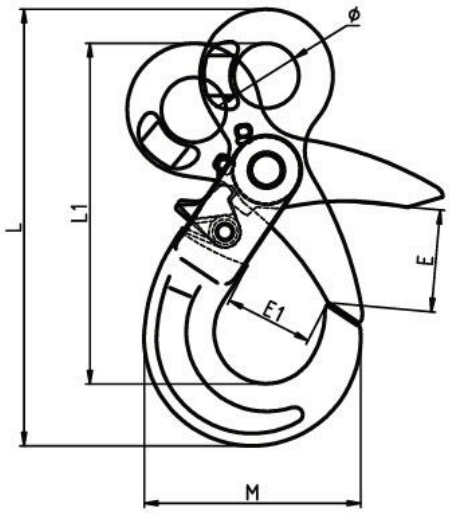

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)	Ø (mm)	E (mm)	E1 (mm)	L1 (mm)	L (mm)	M (mm)	WLL (t)	Weight (kg)
T-737/6	6	21	30	28	110	141	70.5	1.12	0.5
T-737/7-8	7/8	25	30.4	35	136	175	88	2	0.88
T-737/10	10	34.5	48	45	168	214	108	3.15	1.58
T-737/13	13	40	54	52.5	207	268	136	5.3	3
T-737/16	16	50	47	63.3	254	332	168.6	8	5.9
T-737/20	18/20	64.5	54	86	274.5	332	186.2	12.5	7
T-737/22	22	70	59.4	76	319	415	202	15	12.3
T-737/26	26	80	101	96	362	472	244	21.2	20
T-737/32	32	105	101	133	470	614	329.5	31.5	43

Specifications are for guidance and may change without notice. Always check suitability before use.