
Spec Sheet

Cobra Plus Grade 10 Clevis Reevable Egg Link

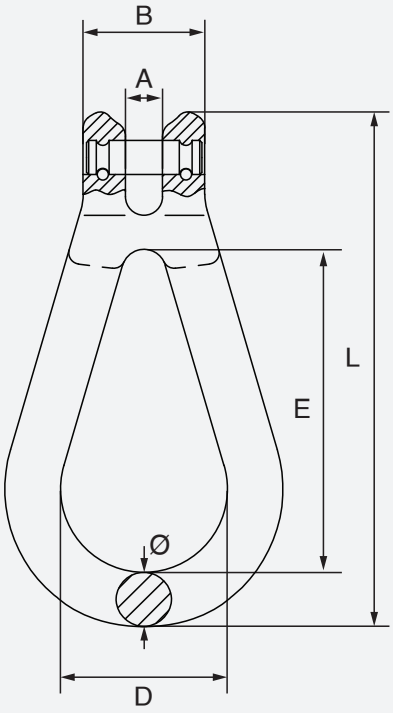

Material	Grade 10 alloy steel, quenched and tempered
Finish	Blue painted
Standard	Meets W.L.L. perf. req. of BS EN 1677-1 +25% of loads
Temp. Range	-20°C up to +200°C
Safety Factor	MBL equals 4 x W.L.L.
Markings	COBRA+, material grade, size, product ID mark and traceability code
Certification	2.1 DoC

Product Code	Chain Dia mm	A mm	B mm	D mm	E mm	Ø mm	L mm
G100REL8	8	10	32.8	45	85	15	139
G100REL10	10	12	42	59	108	19	174
G100REL13	13	16.5	55.5	66.5	137	22	228
G100REL16	16	19	68	72	165	26	264

Chain Dia mm	W.L.L. t	M.P.L. t	M.B.L. t	Weight kgs
7/8	2.5	6.25	10	0.53
10	4	10	16	0.95
13	6.7	16.75	26.8	1.76
16	10	25	40	2.8

COBRA GRADE 10

1062 Series



Cobra Plus Grade 10 Clevis Reevable Egg Link

The Cobra Plus clevis reevable egg link is a grade 10 clevis type link meeting the performance requirements of BS EN 1677-1 +25% of loadings.

The open, egg shaped design makes it easy to “reeve” slings or chains through the link.

Clevis design enables direct connection to grade 10 chain.