

Yale*MINI 360*

Hand chain hoist

new!

Capacity 250 - 500 kg

The smallest of the Yale hand chain hoists has a compact design and a hand chain wheel cover that allows a rotation of 360°. This ensures a high level of safety, as it is possible to work outside the danger zone.

The housing of the new YaleMINI 360 is made of die-cast aluminium, which makes it a very lightweight hand chain hoist. Due to the low weight, there are countless possible applications, e.g. assembly work in industry, car repair shops, crafts etc.

Features

- With the 360° rotating hand chain guide, a very large work area can be covered, this makes it possible for the operator to stand clear of the danger zone.
- Compact design, light weight, easy to carry.
- Made of die-cast aluminium.
- Due to the compact housing, all internal parts are protected. The device can therefore also be used outdoors or in rough environments.
- The load pressure brake complies with all technical regulations, thus the load is held in any position.
- The standard equipment includes forged lifting and load hooks made from age-resistant high-alloy tempered steel, which open when overloaded without breaking. The hooks can be rotate through 360 degrees and are fitted with robust safey catches.
- The galvanized steel load chain complies with all applicable national and international regulations.
  The optimal fit to the load chain wheel ensures safe and long lasting operation.

360°

EXPERIENCE THE ADVANTAGE OF 360°






Due to its size, the YaleMINI 360 fits into every tool box and supports the operator in his work.

Technical data Yale*MINI 360*

Model	Art.-No.	Capacity kg	Number of chain falls	Chain dimensions d x p in mm/ design	Lift per 1 m hand chain overhaul mm	Handle pull at WLL daN	Weight at standard lift (3 m) kg
Yale*MINI 360* 250	192084199	250	1	3 x 9 - T	40	25	2.9
Yale*MINI 360* 500	192084200	500	1	4 x 12 - T	25	24	4.3

Dimensions Yale*MINI 360*

Model	Yale*MINI 360* 250	Yale*MINI 360* 500
A min., mm	245	285
B, mm	17	22
C, mm	21	23
D, mm	13	18
E, mm	84	104
F, mm	87	101
G, mm	51	58
H, mm	36	43
K, mm	150	175

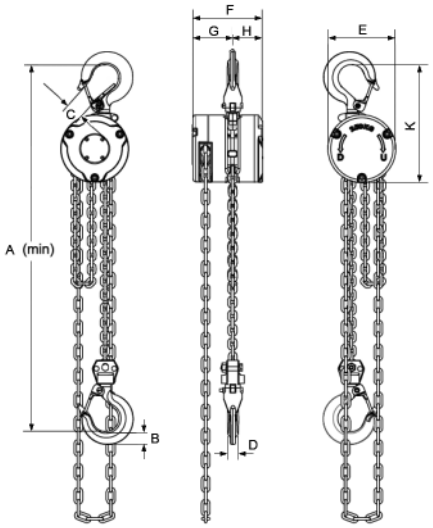

INFO

Yale hoists and trolleys are not designed for passenger elevation applications and must not be used for this purpose.



Capacity 250 kg

Capacity 500 kg



Lifting application



Pulling application